ALL these details to be read in conjunction with Technical Bulletin Reference Number MRC/FR/PF/PDOB/BU/001

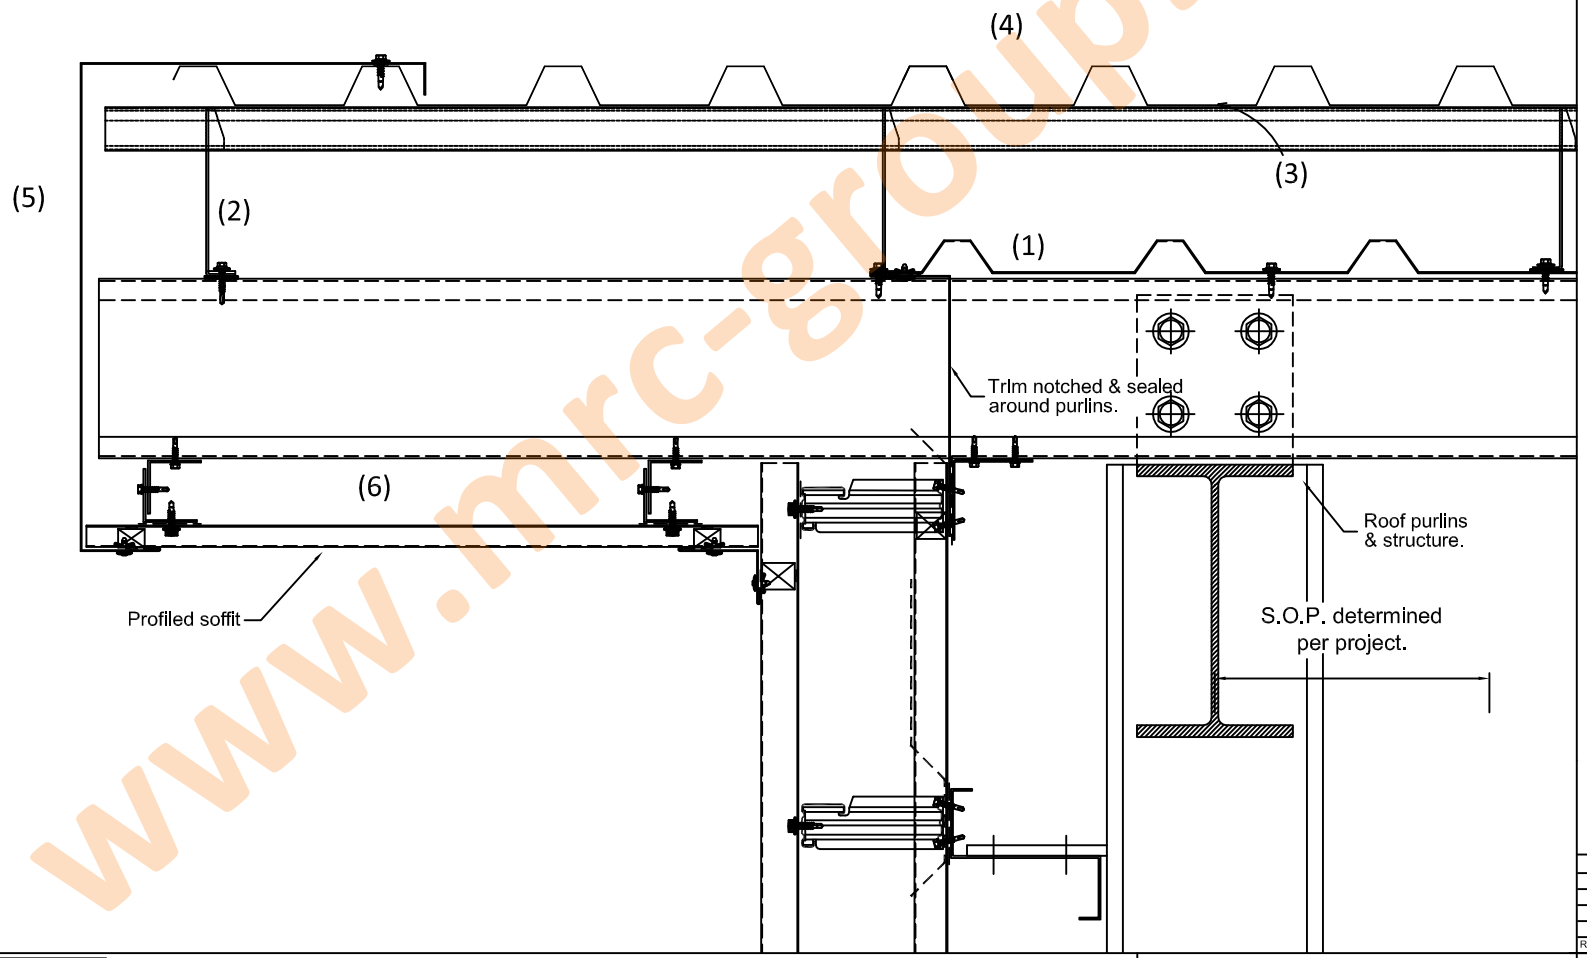


## SYSTEM SPECIFICATION.

(1) MRC Liner Sheet or existing roof sheeting as per specification.

(2) Ashgrid Bar & Bracket Spacer Support System with Thermal Pad & Fixings as per specification.

(3) Optional Thermal Insulation as per specification, if not used then a MRC Breather Membrane to be installed between the Ashgrid and the 'Pierced Fix' roofing system.

(4) MRC 'Pierced Fix' Roof Sheeting as per specification.

(5) Barge metal flashing as per specification.

(6) MRC Soffit System.

| Rev | Date | Initial | Description |
|---|---|---|---|
| | | | |


MRC Systems (PTY) Ltd
Offices: Johannesburg, Durban, Cape Town



This drawing is copyright and is issued on the express condition that it is not to be copied or disclosed by or to any unauthorised person or firms without prior consent in writing from MRC Group.


## GENERAL NOTES.

1). Do not scale from this drawing.
2). All dimensions shown on this drawing are in millimetres (mm) and are nominal unless marked.
3). Isolate all interfaces between dissimilar materials.
4). All details backed by the 'Guardian' System Warranty.

| | |
|---|---|
| Drawing Title: Overhang Barge With Vertical Cladding | Project: MRC Group 'Pierced Fix' Built Up Roof Construction With Liner Sheet |
| Drawn: MRC | Date: 08/2015 |
| Scale: 1:5 @ A3 | Check: |
| Drawing No.: MRC/FR/PF/PDOB/BU/DWG005 | Rev: |


www.mrc-group.co.za